

# LR431 LINEAR INTEGRATED CIRCUIT

## PROGRAMMABLE PRECISION REFERENCE


### DESCRIPTION

The LRC LR431 is a three-terminal adjustable regulator with a guaranteed thermal stability over applicable temperature ranges. The output voltage may be set to any value between  $V_{ref}$  (approximately 2.5V) and 36V with two external resistors. It provides very wide applications, including shunt regulator, series regulator, switching regulator, voltage reference and others.

### FEATURES



- \*Programmable output Voltage to 36V.
- \*Low dynamic output impedance 0.2 $\Omega$ .
- \*Sink current capability of 1 to 100mA.
- \*Equivalent full-range temperature coefficient of 50ppm/  $^{\circ}\text{C}$  typical for operation over full rated operating temperature range.

We declare that the material of product compliance with RoHS requirements.

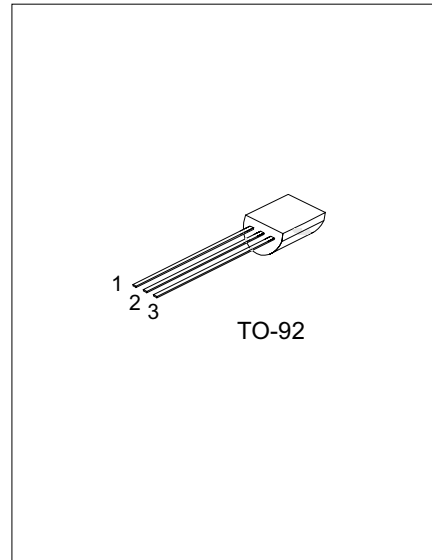

TO-92 1: Ref ; 2: Anode; 3: Cathode

### BLOCK DIAGRAM

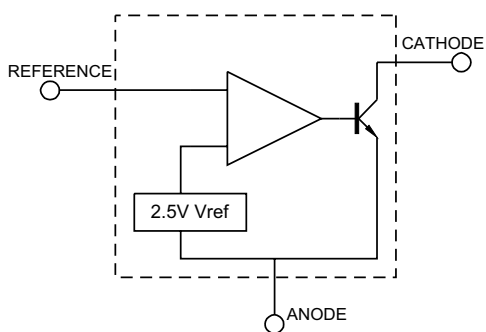

## LR431 LINEAR INTEGRATED CIRCUIT

ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

PARAMETER	SYMBOL	VALUE	UNIT
Cathode Voltage	V <sub>KA</sub>	37	V
Cathode Current Range(Continuous)	I <sub>KA</sub>	-100 ~ +150	mA
Reference Input Current Range	I <sub>ref</sub>	-0.05 ~ +10	mA
Operating Junction Temperature	T <sub>j</sub>	150	°C
Operating Ambient Temperature	T <sub>opr</sub>	-40 ~ +70	°C
Storage Temperature	T <sub>stg</sub>	-65 ~ +150	°C

RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT
Cathode Voltage	V <sub>KA</sub>	V <sub>REF</sub>		36	V
Cathode Current	I <sub>KA</sub>	1		100	mA

ELECTRICAL CHARACTERISTICS (T<sub>a</sub>=25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Reference Input Voltage	V <sub>ref</sub>	V <sub>KA</sub> =V <sub>REF</sub> , I <sub>KA</sub> =10mA		2.50		V
Deviation of reference Input Voltage Over temperature(note 1)	ΔV <sub>ref</sub> /ΔT	V <sub>KA</sub> =V <sub>REF</sub> , I <sub>KA</sub> =10mA T <sub>MIN</sub> ≤T <sub>A</sub> ≤T <sub>MAX</sub>		4.5	17	mV
Ratio of Change in Reference Input Voltage to the Change in Cathode Voltage	ΔV <sub>ref</sub> / ΔV <sub>KA</sub>	I <sub>KA</sub> =10mA ΔV <sub>KA</sub> =10V~V <sub>REF</sub> ΔV <sub>KA</sub> =36V~10V		-1.0 -0.5	-2.7 -2.0	mV/V
Reference Input Current	I <sub>ref</sub>	I <sub>KA</sub> =10mA, R <sub>1</sub> =10kΩ, R <sub>2</sub> =∞		1.5	4	μA
Deviation of Reference Input Current Over Full Temperature Range	ΔI <sub>ref</sub> /ΔT	I <sub>KA</sub> =10mA, R <sub>1</sub> =10kΩ, R <sub>2</sub> =∞ T <sub>A</sub> =full Temperature		0.4	1.2	μA
Minimum Cathode Current for Regulation	I <sub>KA</sub> (min)	V <sub>KA</sub> =V <sub>REF</sub>		0.45	1.0	mA
Off-State Cathode Current	I <sub>KA</sub> (OFF)	V <sub>KA</sub> =36V, V <sub>REF</sub> =0		0.05	1.0	μA
Dynamic Impedance	Z <sub>KA</sub>	V <sub>KA</sub> =V <sub>REF</sub> , I <sub>KA</sub> =1 to 100mA f≤1.0kHz		0.15	0.5	Ω







Note: T<sub>MIN</sub>=0°C, T<sub>MAX</sub>=+70°C

CLASSIFICATION OF V<sub>ref</sub> AND PACKAGE

Device	LR431A	LR431B	LR431C	LR431ALT1	LR431BLT1	LR431CLT1
Rank	0.5%	1%	2%	0.5%	1%	2%
Range(V)	2.487~2.512	2.475~2.525	2.450~2.550	2.487~2.512	2.475~2.525	2.450~2.550
Marking	LR431A	LR431B	LR431C	RA	RB	RC
Package	TO-92	TO-92	TO-92	SOT-23	SOT-23	SOT-23

# LR431 LINEAR INTEGRATED CIRCUIT

## TYPICAL PERFORMANCE CHARACTERISTICS

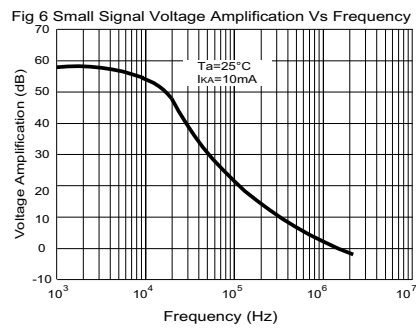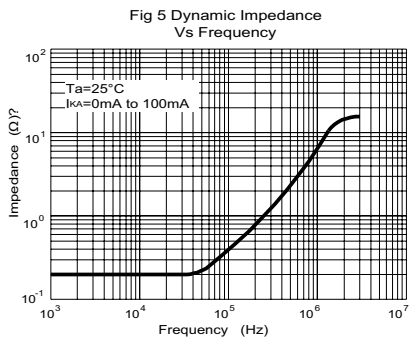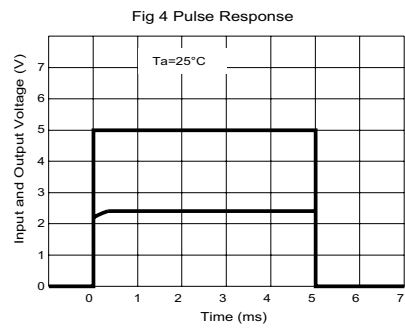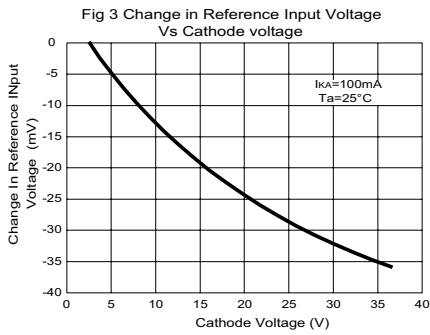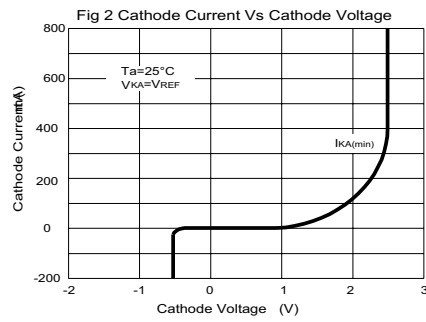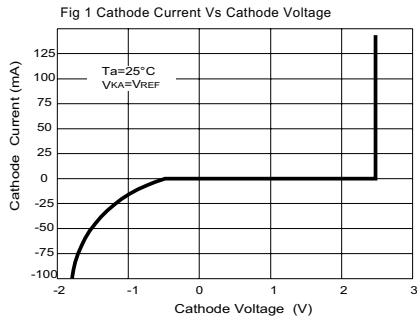

# LR431 LINEAR INTEGRATED CIRCUIT

## TEST CIRCUIT




Fig 7 Test Circuit For  $V_{KA}=V_{REF}$




Fig 8 Test Circuit for  $V_{KA} \geq V_{REF}$




Fig 9 Test Circuit For  $I_{KA(OFF)}$

## APPLICATION CIRCUIT




Fig 10 Shutdown Regulator




Fig 11 Output Control of a Three-Terminal Fixed Regulator




Fig 12 Higher-current Shunt Regulator

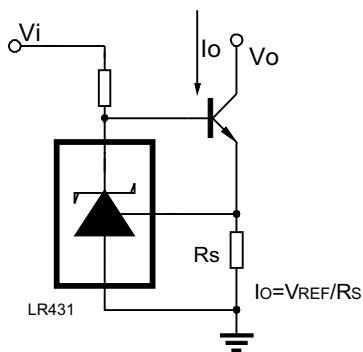


Fig 13 Constant-current Sink

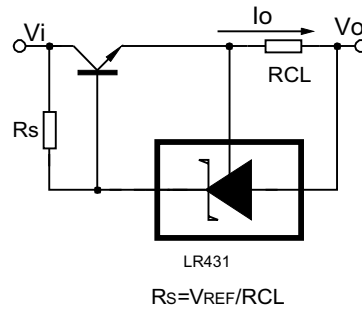
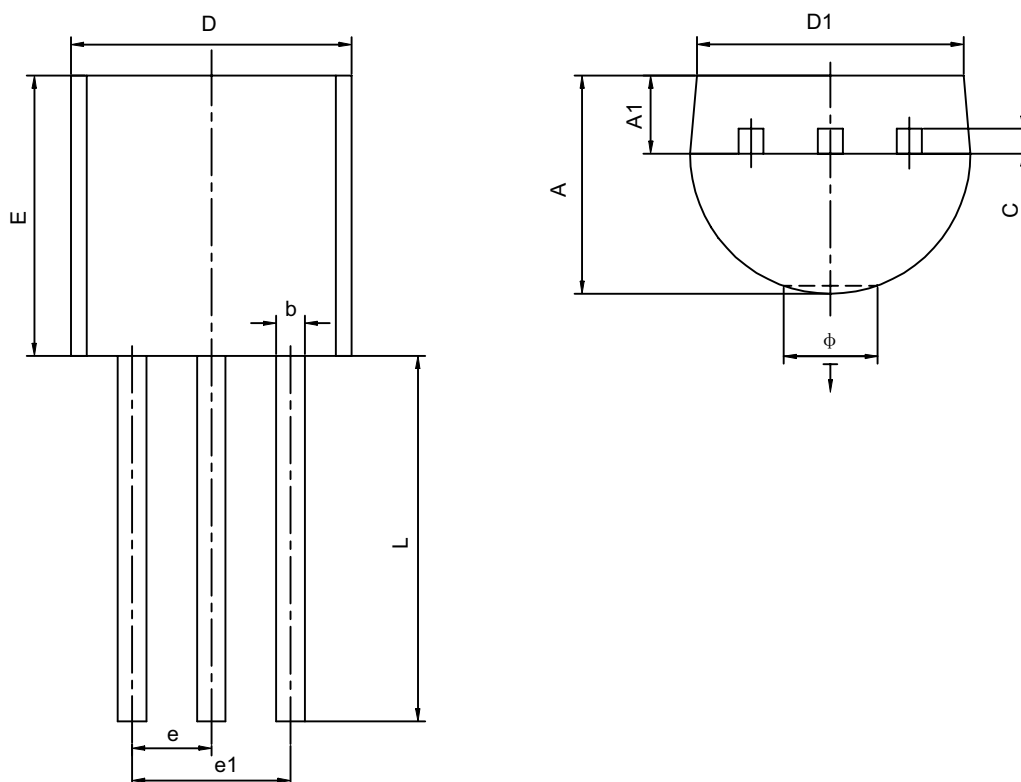


Fig 14 Current Limiting or Current Source

**TO-92 PACKAGE OUTLINE DIMENSIONS**


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	3.300	3.700	0.130	0.146
A1	1.100	1.400	0.043	0.055
b	0.380	0.550	0.015	0.022
c	0.360	0.510	0.014	0.020
D	4.400	4.700	0.173	0.185
D1	3.430		0.135	
E	4.300	4.700	0.169	0.185
e	1.270TYP		0.050TYP	
e1	2.440	2.640	0.096	0.104
L	14.100	14.500	0.555	0.571
$\phi$		1.600		0.063
T	0.000	0.380	0.000	0.015