

SM320BF thru SM3100BF

Schottky Barrier Rectifiers

Reverse Voltage 20 to100V Forward Current 3.0A

FEATURES

- * Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- * Low power loss,high efficiency
- * For use in low voltage high frequency inverters, free wheeling,and polarity protection applications
- * Guardring for over voltage protection
- * High temperature soldering guaranteed:
260°C/10 seconds at terminals

Mechanical Data

Case: JEDEC SMB-FL

molded plastic over glass die

Terminals: Plated leads, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any


Weight: 0.066 g

Handling precaution:None

Electrical Characteristic

1.Maximum Ratings & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter Symbol	symbol	SM320BF	SM330BF	SM340BF	SM350BF	SM360BF	SM380BF	SM3100BF	Unit
device marking code		S32	S33	S34	S35	S36	S38	S310	
Maximum repetitive peak reverse voltage	V_{RRM}	20	30	40	50	60	80	100	V
Maximum RSM voltage	V_{RSM}	14	21	28	35	42	56	70	V
Maximum DC blocking voltage	V_{DC}	20	30	40	50	60	80	100	V
Maximum average forward rectified current lead length at TC = 75°C	$I_F(AV)$	3.0							A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	80							A
Typical thermal resistance (Note1)	$R_{\theta JA}$ $R_{\theta JC}$	135 25							°C/W
Operating junction and storage temperature range	T_J , T_{STG}	-40 to +150							°C

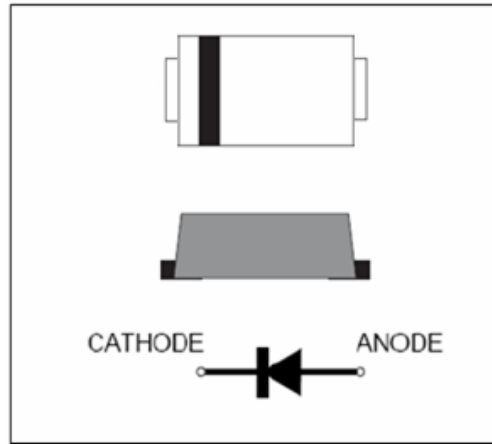

we declare that the material of product is halogen free (green epoxy compound).

Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter Symbol	symbol	SM320BF	SM330BF	SM340BF	SM350BF	SM360BF	SM380BF	SM3100BF	Unit
Maximum instantaneous forward voltage at 3.0A	V_F	0.55			0.70		0.85		V
Maximum DC reverse current $T_A = 25^\circ\text{C}$ at rated DC blocking voltage $T_J = 100^\circ\text{C}$	I_R				0.5 10.0				mA
Typical junction capacitance at 4.0V, 1MHz	C_J				180				PF

NOTES:

1.8.0mm2 (.013mm thick) land areas

SM320BF thru SM3100BF

2. Ratings and Characteristic Curves (TA = 25°C unless otherwise noted)

Fig. 1 - Forward Current Derating Curve

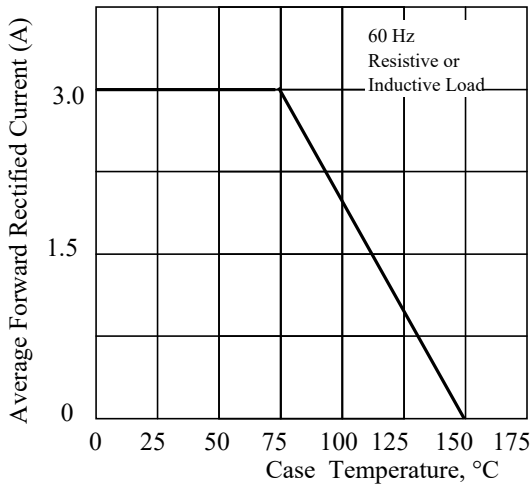


Fig. 2 - Maximum Non-repetitive Peak Forward Surge Current

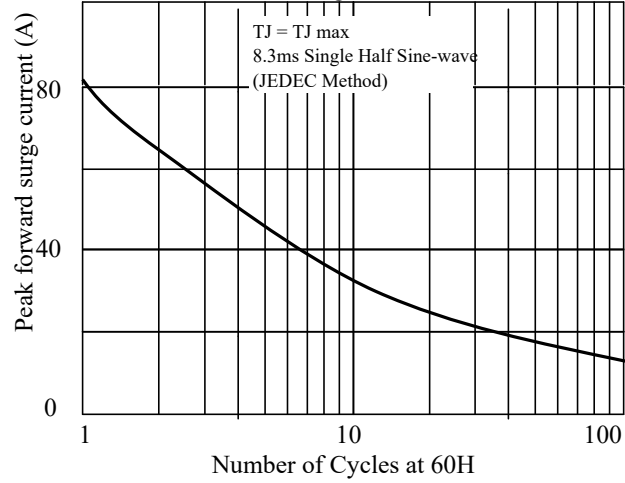


Fig 3. - Typical Instantaneous Forward Characteristics

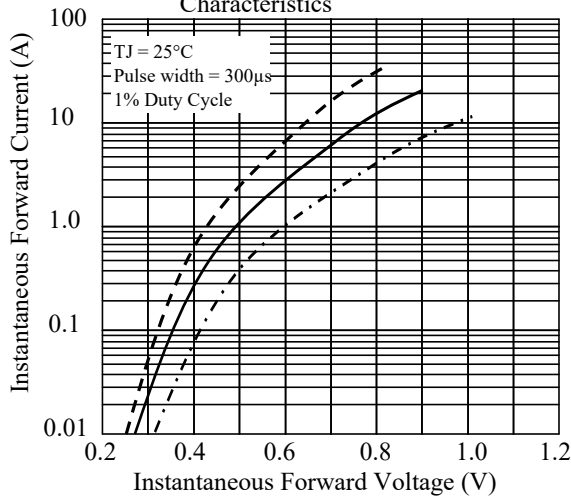


Fig 4. - Typical Reverse Characteristics

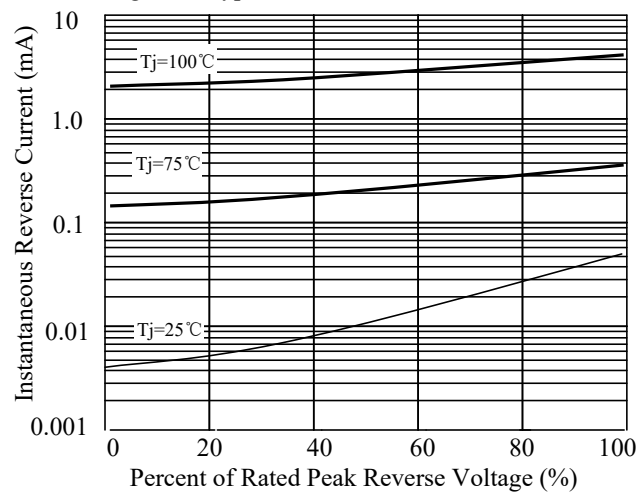


Fig 5. - typical transient thermal impedance



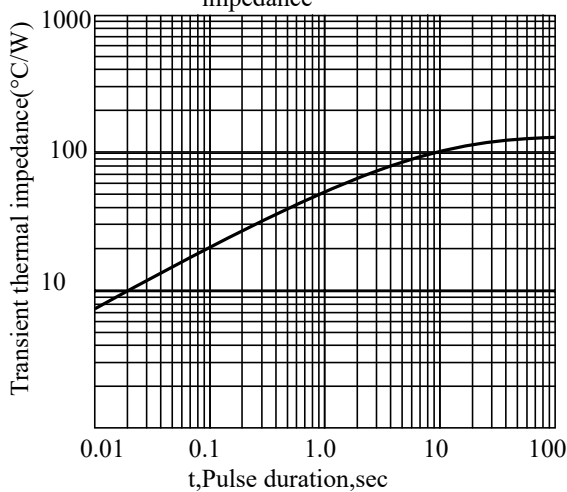


Fig 6. - Typical Junction Capacitance

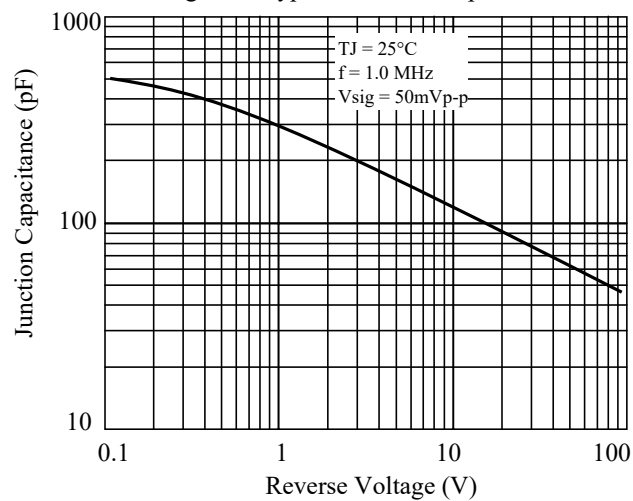


SM320BF thru SM3100BF

3. Outline And Dimension

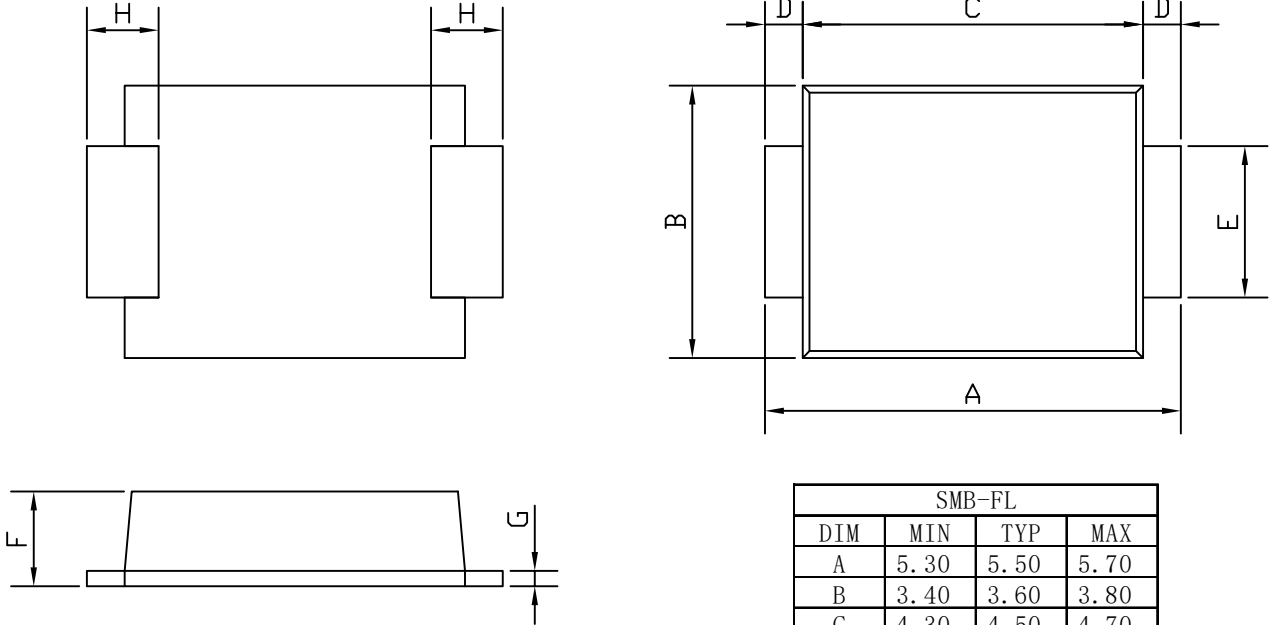

SMB-FL			
DIM	MIN	TYP	MAX
A	5.30	5.50	5.70
B	3.40	3.60	3.80
C	4.30	4.50	4.70
D	0.45Typ		
E	1.90	2.00	2.10
F	1.05	1.25	1.40
G	0.10	0.20	0.30
H	0.95Typ		
All Dimensions in mm			

4. Soldering Footprint

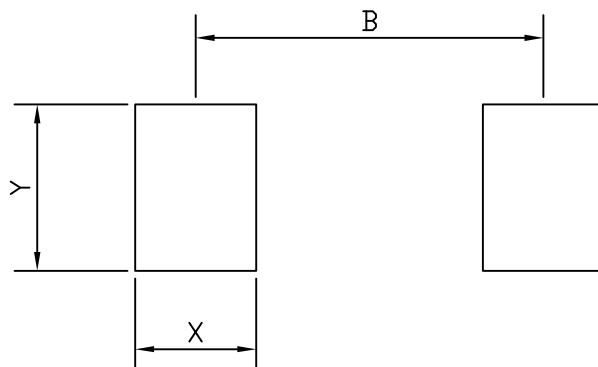

SMB-FL	
DIM	(mm)
X	1.60
Y	2.20
B	4.60

SM320BF thru SM3100BF

4. Update Record

版次	更新记录	更新作者	更新日期
2	更新散热系数	周杰	2015.01.21
B	VF 0.5V 变更到0.55V	谭志伟	2021.10.12
C	刷新POD	陈帅	2025.09.17